



# TECHNICAL DATA SHEET | Creative Concrete Electromagnetic Meter Chamber 1500mm Aligned with STD-W-26

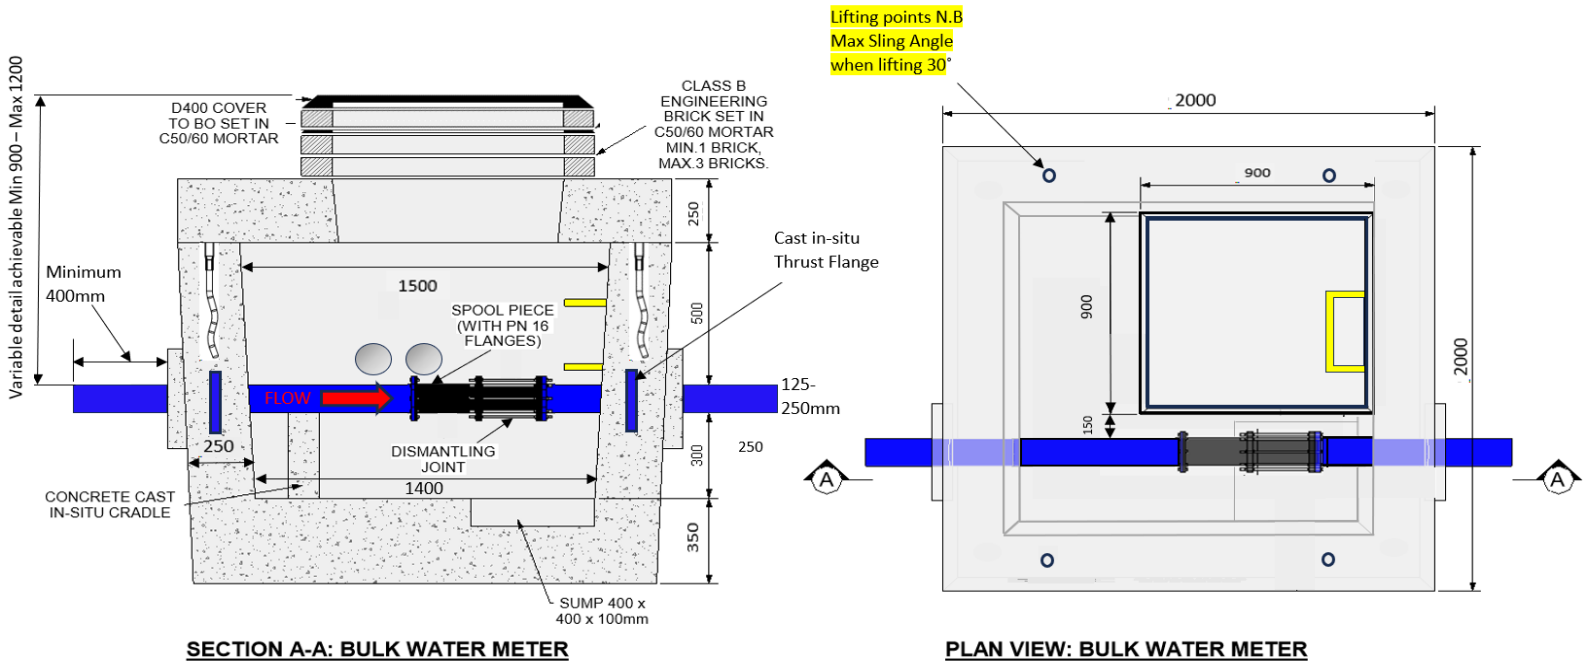

## CONFIDENCE IN CONCRETE™

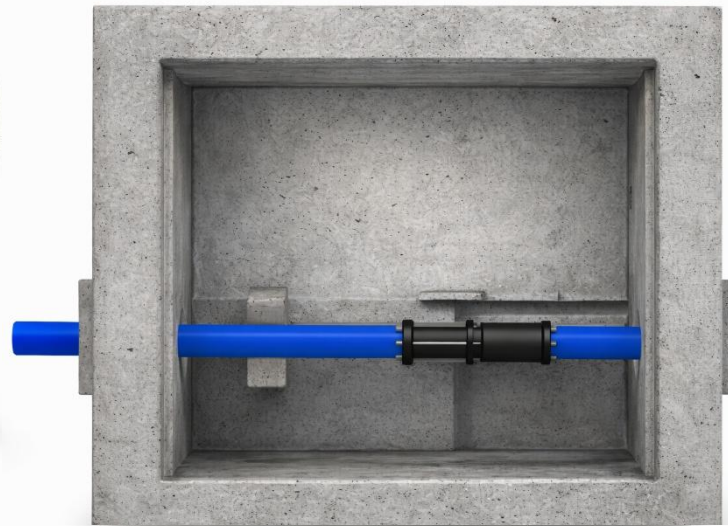

### TECHNICAL DATA

|                       |                                               |
|-----------------------|-----------------------------------------------|
| Mechanical Resistance | Vertical Strength 400kN                       |
| Chamber Approx Weight | 7300KG                                        |
| Cover Approx Weight   | 1900KG                                        |
| Opening Size          | (LN x WN) 1500mm, 1500mm Square               |
| Watertightness        | No Leakage of joint or unit at 30kPa          |
| Durability            | Adequate for normal serviceability conditions |
| Lifting Instructions  | Max Sling Angle when lifting 30°              |

### FEATURES

|                                                          |   |
|----------------------------------------------------------|---|
| Integrated Duct Openings                                 | ✓ |
| Manufactured to the highest standards.                   | ✓ |
| Steel Reinforced                                         | ✓ |
| Integrated Steps                                         | ✓ |
| 4 Integrated Lifting Sockets                             | ✓ |
| Integrated 150, 200, 250, 300mm Pipe & Dismantling Joint | ✓ |

All Products are manufactured in compliance with EN 1917:2002&AC:2008 Concrete Manholes and Inspection Chambers Un-Reinforced, Steel, Fibre, And Reinforced. The information contained in this TDS was up to date at time of going to print. Profiles, sizes, weights are given as an indication only. The manufacturer reserves the right to modify these at any time without notice. Rev\_06

