
## TECHNICAL DATA SHEET

Uisce Éireann IRISH WATER


50MM Electromagnetic Meter 1200mm Chamber STD-W-26

CREATIVE

## BWM 50mm

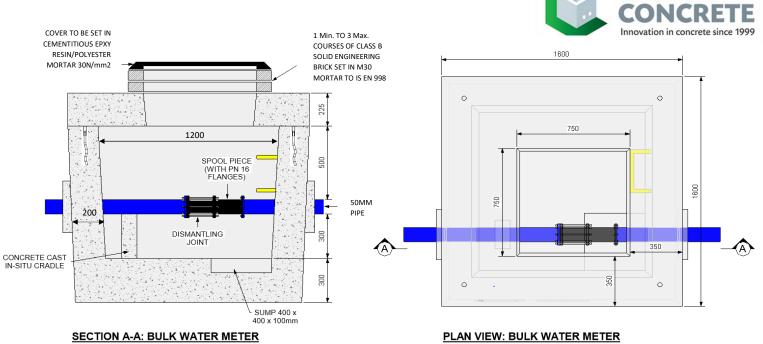

## CONFIDENCE IN CONCRETE

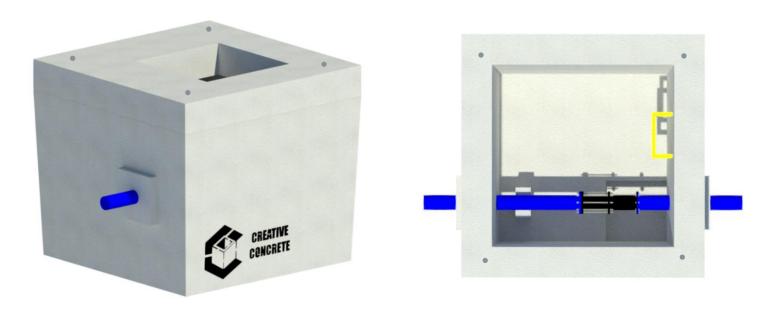

TECHNICAL DATA		FEATURES	
Mechanical Resistance	Vertical Strength 400kN	Integrated Duct Openings	<
Approx Chamber Weight	4190KG	Manufactured to the highest standards.	$\checkmark$
Approx Cover Weight	1140KG	Steel Reinforced	$\checkmark$
Opening Size	(LN x WN) 1200mm, 1200mm Square	Integrated Steps	$\checkmark$
Watertightness	No Leakage of joint or unit at 30kPa	4 Integrated Lifting Sockets	<ul> <li></li> </ul>
Durability	Adequate for normal serviceability conditions	Integrated 50mm Pipe & Dismantling	<ul> <li></li> </ul>
Rev_05		Joint	
All Droducts are m	anufactured in compliance with EN 1017-20028 AC:2008 Concrete Manhales	and Incorpetion Chambers IIn Deinfenred Steel Eilen And	

All Products are manufactured in compliance with EN 1917:2002&AC:2008 Concrete Manholes and Inspection Chambers Un-Reinforced, Steel, Fibre, And Reinforced. Profiles, sizes, weights are given as an indication only. The manufacturer reserves the right to modify these at any time without notice. Concrete Chambers Ireland Ltd T/A Creative Concrete







