
TECHNICAL DATA SHEET

Irish Water


Uisce Éireann Fire Hydrant Chamber STD-W-16



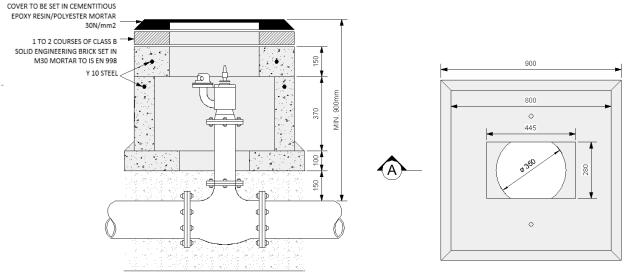

PLAN VIEW WITH COVER OPENING 445 X 280MM

CONFIDENCE IN CONCRETE



TECHNICAL DATA		FEATURES
Mechanical Resistance	Vertical Strength 400kN	Integrated Base Opening
Chamber Approx Weight	440KG	Manufactured to the highest standards.
Cover Approx Weight	195KG	Steel Reinforced
Chamber Opening Size	(LN x WN) 600mm, 600mm Square	Integrated Steps
Watertightness	No Leakage of joint or unit at 30kPa	Integrated Lifting Sockets
Durability	Adequate for normal serviceability conditions	REV_05

All Products are manufactured in compliance with EN 1917:2002&AC:2008 Concrete Manholes and Inspection Chambers Un-Reinforced, Steel, Fibre, And Reinforced. Profiles, sizes, weights are given as an indication only. The manufacturer reserves the right to modify these at any time without notice. Concrete Chambers Ireland Ltd T/A Creative Concrete









 \checkmark