





**CREATIVE
CONCRETE**
Innovation in concrete since 1999

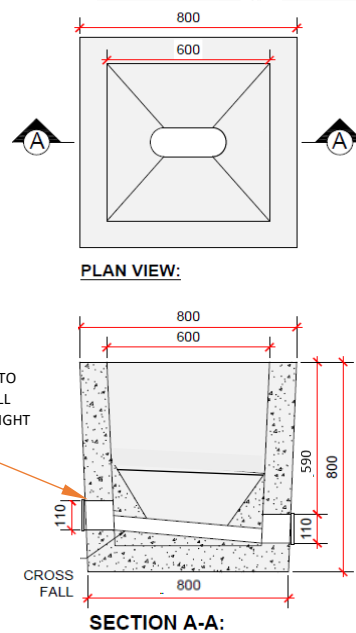

CONFIDENCE IN CONCRETE™

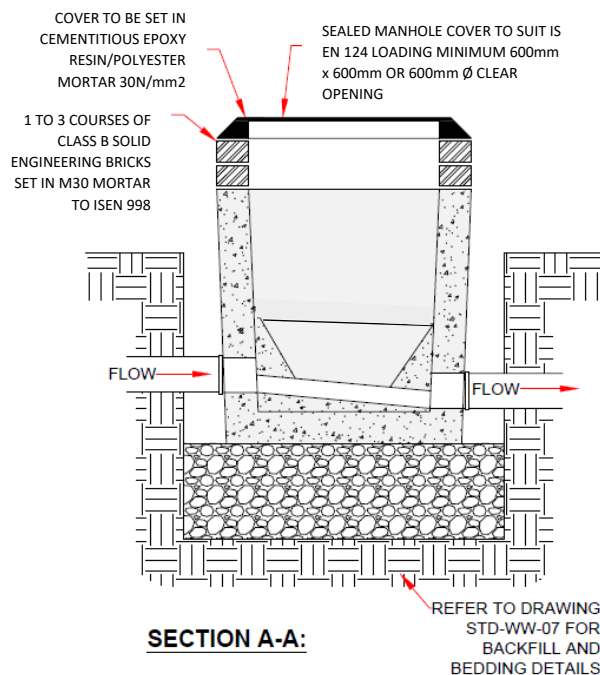

FLORITE™

TECHNICAL DATA	
Mechanical Resistance	Vertical Strength 400kN
Approx Weight	770KG
Opening Size	(LN x WN) 600mm, 600mm Square
Watertightness	No Leakage of joint or unit at 30kPa
Durability	Adequate for normal serviceability conditions

FEATURES	
Integrated Duct Openings 110/160	✓
Manufactured to the highest standards.	✓
Steel Reinforced	
Integrated Steps	
Integrated Lifting Sockets	✓
REV_06	

All Products are manufactured in compliance with EN 1917:2002&AC:2008 Concrete Manholes and Inspection Chambers Un-Reinforced, Steel, Fibre, And Reinforced. Profiles, sizes, weights are given as an indication only. The manufacturer reserves the right to modify these at any time without notice.

Concrete Chambers Ireland Ltd T/A Creative Concrete

